

MF 3 SERIES GROUND EFFECT Easy-to-use ergonomically placed controls Stage V-compliant 4-cylinder, 3.6-liter engine (>75 HP) or 3.4-liter engine (75 HP) **New Hood Styling** ▶ Design includes saber stripe and new numbering to match the Massey Ferguson® product portfolio Sculpted chassis helps deliver tight turns

MAXIMIZE YOUR PRODUCTIVITY.

Featuring a low-profile design along with a comfortable operator platform, the MF 3GE is an ideal solution for use on operations that need low clearance under trees or the ability to fit in greenhouses or polytunnels.

At just over 4 feet wide, with a range of horsepower options from 75 to 105, the GE or Ground Effect option allows you to work in areas where other tractors just can't go.

The MF 3GE gives you the power and torque you need to get the job done right, at a lower total cost of ownership than other options in its class.











With a compact aftertreatment system. horizontal exhaust and low hood height, you get unmatched visibility and maneuverability

Design includes saber stripe and new numbering to match the Massey Ferguson product portfolio

MF 3 SERIES SPECIALITY (SP) VINEYARD (VI)

Increased Performanc

Horsepower ranging from 75 to 115 HP with Stage V-compliant 4-cylinder, 3.6-liter engine

From the curved chassis allowing for tighter turns

► Thanks to an increase in gross vehicle weight by up to 880 lbs, allowing the use of larger, higher-capacity implements

TAILOR-MADE FOR YOUR UNIQUE OPERATION.

Featuring some of the best visibility on the market, along with a robust cab enviroment, narrow turning radius and available power shuttle transmission, the MF 3SP and 3VI are ideal solutions for vineyard operations.

At a width of 4 feet, the SP or Specialty option is your perfect partner for working in more open vineyards. And at just over 3 feet wide and coming in at 95 HP, the VI or Vineyard option fits perfectly in narrow vineyard rows.

With options to fit a variety of operations, the SP and VI give you the versatility and power you need, all at a lower total cost of ownership to help you get the most out of your investment.












TECHNICAL SPECIFICATIONS


| | MF 3SP.75 | MF 3GE.75 | MF 3VI.95 | MF 3SP.95 | MF 3GE.95 | MF 3GE.105 | MF 3SP.115 |
|----------|---|--|------------------------------------|--------------------------------------|--|--|---|
| | Specialty | Ground Effect | Vineyard | Specialty | Ground Effect | Ground Effect | Specialty |
| | Cab | Platform | С | ab | Platform | | Cab |
| | | | | | | | |
| HP | 75 | 75 | 95 | 95 | 95 | 105 | 115 |
| L | 3.4 L, 4-cylinder diesel 3.6 L, 4-cylinder diesel | | | | | | |
| | Stage V | | | | | | |
| | Turbocharged air cooled | | | | | | |
| gal (L) | 26.41 (100) | 19.6 (74.2) | 19.6 (74.2) | 26.41 (100) | 19.6 | (74.2) | 26.41 (100) |
| | | | | | | | |
| | (| • | | | | | |
| | | | | | | | • |
| | (| | | | (| , | |
| | | | | | | | • |
| | | , | | | | | |
| | Cat. 1/2 adjustable ball end | Cat. 2 adjustable hook end | Cat. 1/2 adjustable ball end | | Cat. 2 adjustable hook end | | Cat. 1/2 adjustable ball end |
| lbs (kg) | 5511.5 (2500) | 4409.2 (2000) | 5511.5 (2500) | | 4409.2 (2000) | | 5511.5 (2500) |
| | | | | | | | |
| | Open center | | | | | | |
| gpm | 7.87 | | | | | | |
| | 17.64 | | | | | | |
| | gal (L) | Specialty Cab HP 75 L 3.4 L, 4-cy gal (L) 26.41 (100) Cat. 1/2 adjustable ball end lbs (kg) 5511.5 (2500) | Specialty Ground Effect | Specialty Ground Effect Vineyard | Specialty Ground Effect Vineyard Specialty | Specialty Ground Effect Vineyard Specialty Ground Effect | Specialty Ground Effect Vineyard Specialty Ground Effect Effect |

DIMENSIONS

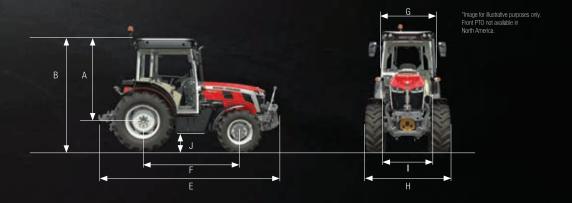

VINEYARD AND SPECIALTY

| | | | VI | SP.75 | SP.95/115 |
|---|---------------------------------|-----|-------|-------|-----------|
| Α | Cab height | in. | 73.2 | 71 | 73.2 |
| В | Overall height with tires | in. | 96.9 | 94.6 | 94.6 |
| Е | Overall length to front support | in. | 165.0 | 160.4 | 160.4 |
| F | Wheelbase | in. | 85.7 | 84.6 | 85.7 |
| G | Cabin width | in. | 39.4 | 47.2 | 47.2 |
| Н | External fender width | in. | 39.4 | 51.2 | 51.2 |
| 1 | Fender-to-fender internal width | in. | 17.7 | 20.5 | 20.5 |
| J | Ground clearance | in. | 10.9 | 11.9 | 12.3 |

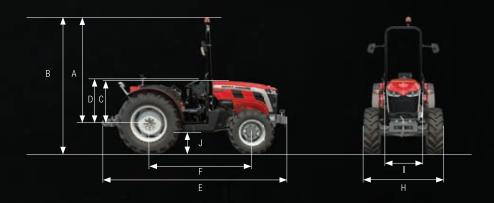

GROUND EFFECT

| | | | GE.75 | GE.95/105 |
|---|---------------------------------|-----|-------|-----------|
| Α | Cab height | in. | 78.2 | 82.6 |
| В | Overall height with tires | in. | 100.9 | 105.3 |
| С | Hood height | in. | 32.7 | 34.6 |
| D | Steering wheel height | in. | 30.7 | 35.9 |
| Е | Overall length to front support | in. | 160.4 | 161.5 |
| F | Wheelbase | in. | 82.1 | 83.3 |
| Н | External fender width | in. | 45.3 | 45.3 |
| 1 | Fender-to-fender internal width | in. | 20.5 | 17.7 |
| J | Ground clearance | in. | 11.3 | 8.9 |
| | | | | |

